


Key Features

- Compact, lightweight, and portable
- 10-point multitouch technology for a more intuitive screen control
- USB-C one-cable solution for multimedia transfer, touch signal transmission, and power charging
- Flexible display setup work at any angle
- Elegant, durable metallic design with a foldable stand



Product **Description**

The ViewSonic TD1655 is a portable 16" Full HD touch monitor perfect for overcoming one-screen limitations outside the office. Extend the screen from phones, tablets, or laptops for mobile work, one-on-one presentations, or leisure entertainment. The two universal USB Type C connectors provide a one-cable solution for audiovisual, power, and touch signal transmission. The adjustable wide stand and pivot-able display will support your working angles. With the anti-slip cover, metal case, aluminum stand, and 6H hardness screen, reliability is embodied in the design.

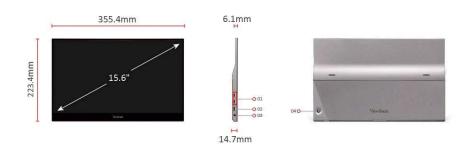

- 1. USB Type C x2
- 2. Mini HDMI
- 3. Audio Out
- 4. Joy Key

Visit Us www.viewsonic.com

	S	Ρ	L.	Α	Y
--	---	---	----	---	---

DISPLAY		
Display Size (in.):	16	
Viewable Area (in.):	15.6	
Panel Type:	IPS Technology	
Resolution:	1920 x 1080	
Resolution Type:	FHD (Full HD)	
Static Contrast Ratio:	800:1 (typ)	
Dynamic Contrast Ratio:	50M:1	
Light Source:	LED	
Brightness:	250 cd/m² (typ)	
Colors:	262K 6 bit true	
Color Space Support:		
Aspect Ratio:	16:9	
Response Time (Typical GTG):	6.5ms	
Response Time (GTG w/OD):	6.599ms	
Response Time (Typical Tr+Tf):	30ms	
Viewing Angles:	178° horizontal, 178° vertical, CR>5; 170° horizontal, 170° vertical, CR>10	
Backlight Life (Hours):	15000 Hrs (Min)	
Curvature:	Flat	
Refresh Rate (Hz):	60	
Blue Light Filter:	Yes	
Color Gamut:	NTSC: 45% size (Typ) sRGB: 64% size (Typ)	
Pixel Pitch:	0.179 mm (H) x 0.179 mm (V)	
Touch Screen:	Projected Capacitive, 10- point multi-touch	
Surface Treatment:	Glossy w/ anti-finger print, Hard Coating (≧6H)	
Cover Glass Thickness:	0.8mm	
COMPATIBILITY		
PC Resolution (max):	1920x1080	
Mac® Resolution (max):	1920x1080	
PC Operating System:	Windows 10/11 certified; macOS tested	
Mac® Resolution (min):	1920x1080	
CONNECTOR		
USB 3.2 Type C Up Stream; DisplayPort Alt mode :	2 (60W power charger)	
3.5mm Audio Out:	1	
Mini HDMI:	1	
Power in:	USB Type C (with video & data)	
AUDIO		
Internal Speakers:	0.8Watts x2	
POWER		
Eco Mode (Conserve):	6W	
Eco Mode (optimized):	6.9W	

6"Touch Portable Monitor - ViewSonic भारत, India					
CONTROLS					
Physical Controls:	Up, Right, Down, Left, Power				
On Screen Display:	Input Select, Audio Adjust, ViewMode, Color Adjust, Manual Image Adjust, Setup Menu				
OPERATING CONDITIONS					
Temperature:	32°F to 104°F (0°C to 40°C)				
Humidity (non-condensing):	20% to 90%				
INPUT SIGNAL					
Frequency Horizontal:	15 ~ 82KHz				
Frequency Vertical:	50 ~ 75Hz				
VIDEO INPUT					
Digital Sync:	TMDS - mini HDMI (v1.4), Micro-Packet - Type C				
ERGONOMICS					
Tilt (Forward/Back):	20° / 60°				
WEIGHT (IMPERIAL)					
Net (lbs):	2.1				
Net Without Stand (lbs):	2.1				
Gross (lbs):	5.1				
WEIGHT (METRIC)					
Net (kg):	0.96				
Net Without Stand (kg):	0.96				
Gross (kg):	2.3				
DIMENSIONS (IMPERIAL) (WX	(HXD)				
Packaging (in.):	17.3 x 11.3 x 3.5				
Physical (in.):	13.99 x 8.8 x 0.58				
Physical Without Stand (in.):	13.99 x 8.8 x 0.58				
DIMENSIONS (METRIC) (WXH	XD)				
Packaging (mm):	440 x 288 x 89				
Physical (mm):	355.46 x 223.44 x 14.7				
Physical Without Stand (mm):	355.46 x 223.44 x 14.7				
GENERAL					
Regulations:	cTUVus, FCC-B, ICES003, Energy Star, EPEAT, CEC, NRCan, MX-CoC, Mexico Energy, CE, CE EMC, CB, ROHS, ErP, REACH, WEEE, EAC, UkrSEPRO, BSMI, RCM, GEMS, VCCI, PSE, BIS				
PACKAGE CONTENTS:	TD1655 x1, mini HDMI to HDMI Cable (v1.4; Male-Male) x1, USB Type-C Cable (Male-Male) x1, USB Type-C to Type-A 3.2 Gen1 Cable (Male-Male) x1, AC/DC Adapter x1, Quick Start Guide x1, Protect cover x1, Clean cloth x1, Passive touch pen x1				
Recycle/Disposal:	Please dispose of in accordance with local, state or federal laws.				

Consumption (typical):	8W	Marrantu	*Warranty offered may differ from market to market	
Consumption (max):	8.3W	Warranty:		
Voltage:	AC 100-240V	Power Management:	Energy Star standards,	
Stand-by:	0.5W	3	EPEAT	
Power Supply:	External Power Adaptor			

Copyright © ViewSonic Corporation 2000-2024. All rights reserved.