


# ViewSonic® LCD DISPLAY TD3207


## Key Features

- Durable and scratch-resistant IP54 front touchscreen
- Highly responsive 10-points PCAP touch technology
- Long-lasting 24/7 usage
- Adaptable to multi-screen orientations
- Ease of installation with VESA-mountable design

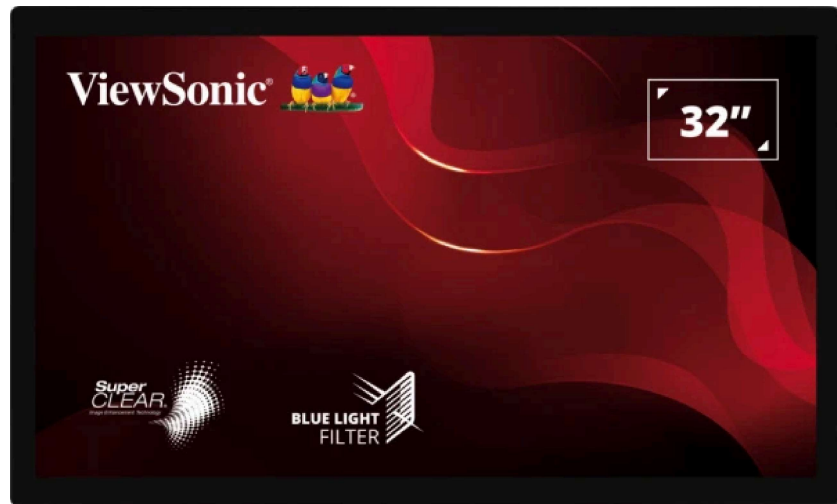

## Product Description

The ViewSonic's TD3207 is the ideal solution for commercial and industrial spaces. Designed for heavy, continuous usage, the open frame series TD3207 delivers a 24/7 long-life. Resistant to moisture and scratches, the 3mm thick glass screen features an intuitive 10-point PCAP touch technology for maximum interactivity. Featuring SuperClear® AMVA panel technology, the device delivers lifelike imagery, vivid color, and constant brightness of up to 450 nits. Connection options include HDMI and DisplayPort inputs for effortless sharing capabilities and an RS232 allows you to control the device remotely. Equipped with VESA mounting design for any surface and screen orientation, the touch screen is the perfect display for various environments.

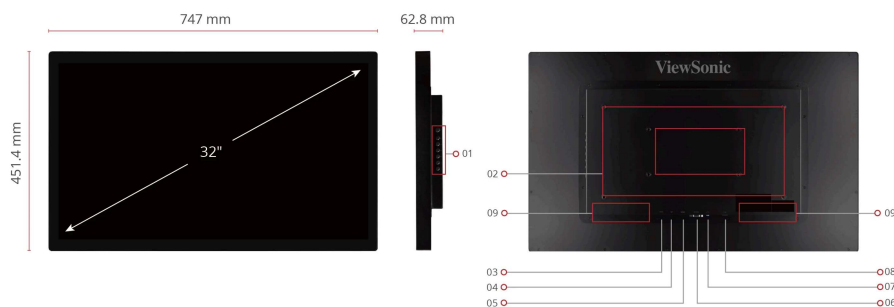

- |  |               |
|--|---------------|
| 1. Menu Control Panel  | 7. Audio In   |
| 2. VESA Compatible(Wall Mount 400 x 200mm)(Wall Mount 200 x 100mm) | 8. USB 2.0    |
| 3. DC in   | 9. Speaker 2W |
| 4. Display Port  |               |
| 5. HDMI  |               |
| 6. RS232   |               |

**Visit Us**

[www.viewsonic.com](http://www.viewsonic.com)

**DISPLAY**

Display Size (in.):	32
Viewable Area (in.):	31.5
Panel Type:	VA Technology
Resolution:	1920 x 1080
Resolution Type:	FHD (Full HD)
Static Contrast Ratio:	3,000:1 (typ)
Dynamic Contrast Ratio:	50M:1
Light Source:	LED
Brightness:	450 cd/m <sup>2</sup> (typ)
Colors:	16.7M
Color Space Support:	8 bit true
Aspect Ratio:	16:9
Response Time (Typical GTG):	5ms
Response Time (GTG w/OD):	4.6ms
Viewing Angles:	178° horizontal, 178° vertical
Backlight Life (Hours):	50000 Hrs (Min)
Curvature:	Flat
Refresh Rate (Hz):	60
Blue Light Filter:	Yes
Color Gamut:	NTSC: 72% size (Typ) sRGB: 104% size (Typ)
Pixel Size:	0.364 mm (H) x 0.364 mm (V)
Touch Screen:	Projected Capacitive, 10-point multi-touch
Surface Treatment:	Glossy, Hard Coating (7H)
Cover Glass Thickness:	3mm

**COMPATIBILITY**

PC Resolution (max):	1920x1080
Mac® Resolution (max):	1920x1080
PC Operating System:	Windows 10/11 certified; macOS tested
Mac® Resolution (min):	1920x1080

**CONNECTOR**

USB 2.0 Type B:	1
3.5mm Audio Out:	1
HDMI 1.4:	1
DisplayPort:	1
Power in:	DC Socket (Center Positive)
RS232 In:	1

**AUDIO**

Internal Speakers:	2Watts x2
--------------------	-----------

**POWER**

Eco Mode (Conserve):	27W
Eco Mode (optimized):	35W
Consumption (typical):	43W

**CONTROLS**

Physical Controls:	1, 2, Up, Down, Left, Right, Power
On Screen Display:	Contrast/Brightness, Input Select, Audio Adjust, Color Adjust, Information, Manual Image Adjust, Setup Menu, Memory Recall

**OPERATING CONDITIONS**

Temperature:	32°F to 104°F (0°C to 40°C)
Humidity (non-condensing):	20% to 90%

**WALL MOUNT**

VESA Compatible:	400 x 200; 200 x 100 mm
------------------	-------------------------

**INPUT SIGNAL**

Frequency Horizontal:	15 ~ 73KHz
Frequency Vertical:	47 ~ 75Hz

**VIDEO INPUT**

Digital Sync:	TMDS - HDMI (v1.4), PCI-E - DisplayPort (v1.2)
---------------	--

**ERGONOMICS**

Tilt (Forward/Back):	N/A° / N/A°
----------------------	-------------

**WEIGHT (IMPERIAL)**

Net (lbs):	28.2
Net Without Stand (lbs):	28.2
Gross (lbs):	34.2

**WEIGHT (METRIC)**

Net (kg):	12.8
Net Without Stand (kg):	12.8
Gross (kg):	15.5

**DIMENSIONS (IMPERIAL) (WXHXD)**

Packaging (in.):	34 x 22.7 x 6.4
Physical (in.):	29.4 x 17.8 x 2.5
Physical Without Stand (in.):	29.4 x 17.8 x 2.5

**DIMENSIONS (METRIC) (WXHXD)**

Packaging (mm):	863 x 577 x 163
Physical (mm):	747 x 451 x 64
Physical Without Stand (mm):	747 x 451 x 64

**GENERAL**

Regulations:	cTUVus, FCC-B, ICES003, Energy Star, CE, CE, CE EMC, CB, RoHS, ErP, REACH, WEEE, EAC, UkrSEPRO
PACKAGE CONTENTS:	TD3207 x1, 3-pin Plug (IEC C13 / CEE22) x1, HDMI Cable (v1.4; Male-Male) x1, USB A/B Cable (v2.0; Male-Male) x1, AC/DC Adapter x1, Quick Start Guide x1
Recycle/Disposal:	Please dispose of in accordance with local, state or federal laws.
Warranty:	*Warranty offered may differ from market to

Consumption (max):	45.5W		market
Voltage:	AC 100-240V	Power Management:	Energy Star standards
Stand-by:	0.5W		
Power Supply:	External Power Adaptor		

Copyright © ViewSonic Corporation 2000-2024. All rights reserved.