

Key Features


- Compact, lightweight and portable
- Easily extend display to a larger screen from mobile devices
- 60W USB-C one cable solution for multimedia transfer and power charging*
- Lightweight plastic case design with a foldable stand
- Flexible display setup work at any angle



*External power adaptor required for power charging

Product **Description**

The ViewSonic VA1655 is a portable 16" Full HD monitor perfect for overcoming one-screen limitations outside the office. Extend the screen from phones, tablets, or laptops for mobile work, one-on-one presentations, or leisure entertainment. The two universal USB Type C connectors provide a one-cable solution for audiovisual and power signal transmission. The adjustable stand and pivot-able display will support your working angles.

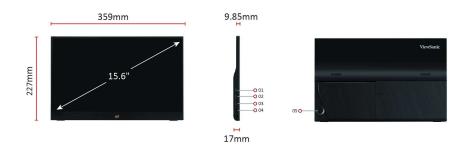

- 1. USB Type C(Power)x1
- 2. USB Type C x1
- 3. Mini HDMI
- 4. Audio Out
- 5. Joy Key

Visit Us www.viewsonic.com

	NOULIC ANTODO TO COR-C LI		oot tromborno irtu, iraia
DISPLAY	40	OPERATING CONDITIONS	0005 1: 40405 (000 1:
Display Size (in.):	16	Temperature:	32°F to 104°F (0°C to 40°C)
Viewable Area (in.):	15.6	Humidity (non-condensing):	20% to 90%
Panel Type:	IPS Technology	INPUT SIGNAL	
Resolution:	1920 x 1080	mini HDMI (v1 Frequency Horizontal: 82KHz, Type C	mini HDMI (v1.4): 15 ~
Resolution Type:	FHD (Full HD)		82KHz, Type C: 24 ~ 82KHz
Static Contrast Ratio:	800:1 (typ)		mini HDMI (v1.4): 50 ~
Dynamic Contrast Ratio:	50M:1	Frequency Vertical:	75Hz, Type C: 50 ~ 75Hz
Light Source:	LED	VIDEO INPUT	
Brightness:	250 cd/m² (typ)	Digital Sync:	TMDS - mini HDMI (v1.4), Micro-Packet - Type C
Colors:	16.2M		
Color Space Support:	8 bit (6 bit + FRC)	ERGONOMICS	
Aspect Ratio:	16:9	Tilt (Forward/Back):	30° / 53°
Response Time (Typical GTG):	7ms	WEIGHT (IMPERIAL)	
Viewing Angles:	170° horizontal, 170°	Net (lbs):	1.5
	vertical	Net Without Stand (lbs):	1.5
Backlight Life (Hours):	15000 Hrs (Min)	Gross (lbs):	3.7
Curvature:	Flat	WEIGHT (METRIC)	
Refresh Rate (Hz):	60	Net (kg):	0.7
Blue Light Filter:	Yes	Net Without Stand (kg):	0.7
Color Gamut:	NTSC: 45% size (Typ) sRGB: 64% size (Typ)	Gross (kg):	1.7
	0.179 mm (H) x 0.179	DIMENSIONS (IMPERIAL) (W	XHXD)
Pixel Pitch:	mm (V)	Packaging (in.):	17.1 x 15.4 x 3.5
Surface Treatment:	Anti-Glare, Hard Coating	Physical (in.):	14.1 x 8.9 x 0.7
COMPATIBILITY	(3H)	Physical Without Stand (in.):	14.1 x 8.9 x 0.7
PC Resolution (max):	1920x1080	DIMENSIONS (METRIC) (WXI	HXD)
Mac® Resolution (max):	1920x1080	Packaging (mm):	434 x 391 x 88
Mac Nesolution (max).		Physical (mm): 359	359 x 227 x 17
PC Operating System:	Windows 10/11 certified; macOS tested	Physical Without Stand (mm):	359 x 227 x 17
Mac® Resolution (min):	1920x1080	GENERAL	
CONNECTOR			cTUVus, FCC-B,
USB 3.2 Type C DisplayPort Alt mode only :	1 (60W power charger)	NOM, Mexico Energy,	EPEAT, CEC, NRCan, NOM, Mexico Energy,
3.5mm Audio Out:	1	Regulations:	CE, CE EMC, CB, RoHS, ErP, REACH, WEEE,
Mini HDMI:	1		EAC, UkrSEPRO, BSMI, RCM, GEMS, VCCI, PSE
Power in:	USB Type C (power only)		BIS
AUDIO			VA1655 x1, mini HDMI to HDMI Cable (v1.4; Male-
Internal Speakers:	0.8Watts x2	PACKAGE CONTENTS:	Male) x1, USB Type-C Cable (Male-Male) x1,
POWER			Quick Start Guide x1, Sleeve case x1
Eco Mode (Conserve):	5.1W		Please dispose of in
Eco Mode (optimized):	6W	Recycle/Disposal:	accordance with local,
Consumption (typical):	7W		state or federal laws.
Consumption (max):	7.3W	Warranty:	*Warranty offered may differ from market to
Voltage:	DC 5V/9V/12V/15V/20V		market
Stand-by:	0.3W	Power Management:	Energy Star standards, EPEAT
Power Supply:	External (Optional)		
ADDITIONAL HARDWARE	,		

Kensington Lock Slot:

CONTROLS

Physical Controls:	Up, Right, Down, Left, Power	
On Screen Display:	Input Select, Audio Adjust, ViewMode, Color Adjust, Manual Image Adjust, Setup Menu	

Copyright © ViewSonic Corporation 2000-2024. All rights reserved.