

ViewSonic® LCD DISPLAY

VA2932-MHD


Key Features

- WFHD 2560 x 1080 resolution
- SuperClear® IPS panel
- 21:9 aspect ratio
- 3-side borderless bezel
- Adaptive sync 75Hz to eliminate screen tearing & reduce stuttering



Product Description

The ViewSonic® VA2932-MHD is a 29" monitor with WFHD2560 x 1080 resolution, 21:9 aspect ratio, and SuperClear® IPS panel. And with SuperClear® IPS technology, this monitor delivers the same image quality whether you are looking at the screen from above, below, the front, or the side. A 21:9 aspect ratio and 3-side borderless bezels provide extra screen real estate so users can display more content, switch between applications more quickly, view documents side by side, and view multiple windows at once.

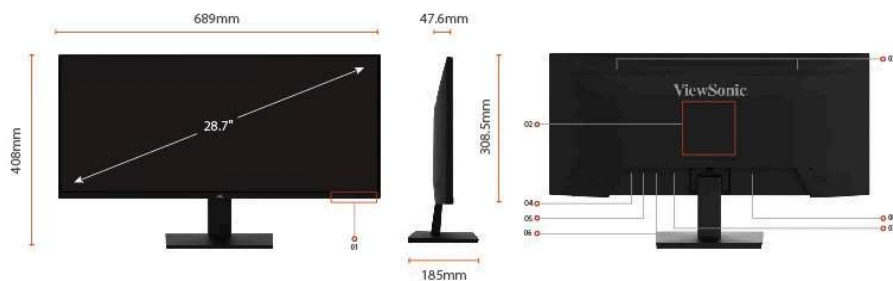

1. Menu Control Panel
2. VESA Compatible(Wall Mount 100 x 100mm)
3. Speaker
4. HDMI
5. HDMI
6. Display Port

7. Audio in
8. AC In

Visit Us

www.viewsonic.com

DISPLAY

Display Size (in.):	29
Viewable Area (in.):	28.7
Panel Type:	IPS Technology
Resolution:	2560 x 1080
Resolution Type:	WFHD (Wide FHD+)
Static Contrast Ratio:	1,000:1 (typ)
Dynamic Contrast Ratio:	80M:1
High Dynamic Range:	HDR10
Light Source:	LED
Brightness:	250 cd/m ² (typ)
Colors:	16.7M
Color Space Support:	8 bit (6 bit + FRC)
Aspect Ratio:	21:9
Response Time (Typical GTG):	4ms
Viewing Angles:	178° horizontal, 178° vertical
Backlight Life (Hours):	30000 Hrs (Min)
Curvature:	Flat
Refresh Rate (Hz):	75
Variable Refresh Rate Technology:	FreeSync
Blue Light Filter:	Yes
Flicker-Free:	Yes
Color Gamut:	NTSC: 85% size (Typ) sRGB: 120% size (Typ)
Pixel Pitch:	0.263 mm (H) x 0.263 mm (V)
Surface Treatment:	Anti-Glare, Hard Coating (3H)

COMPATIBILITY

PC Resolution (max):	2560x1080
Mac® Resolution (max):	2560x1080
PC Operating System:	Windows 10/11 certified; macOS tested
Mac® Resolution (min):	2560x1080

CONNECTOR

3.5mm Audio Out:	1
HDMI 1.4:	2
DisplayPort:	1
Power in:	3-pin Socket (IEC C14 / CEE22)

AUDIO

Internal Speakers:	2Watts x2
--------------------	-----------

POWER

Eco Mode (Conserve):	20W
Eco Mode (optimized):	24W
Consumption (typical):	27W
Consumption (max):	30W
Voltage:	AC 100-240V

CONTROLS

Physical Controls:	Key 1 (favorite), Key 2, Key 3, Key 4, Key 5, Key 6 (power)
On Screen Display:	Input Select, Audio Adjust, ViewMode, Color Adjust, Manual Image Adjust, Setup Menu

OPERATING CONDITIONS

Temperature:	32°F to 104°F (0°C to 40°C)
Humidity (non-condensing):	20% to 90%

WALL MOUNT

VESA Compatible:	100 x 100 mm
------------------	--------------

INPUT SIGNAL

Frequency Horizontal:	24 ~ 86KHz
Frequency Vertical:	48 ~ 75Hz

VIDEO INPUT

Digital Sync:	TMDS - HDMI (v1.4), PCI-E - DisplayPort (v1.4)
---------------	--

ERGONOMICS

Tilt (Forward/Back):	-5° / 20°
----------------------	-----------

WEIGHT (IMPERIAL)

Net (lbs):	9.5
Net Without Stand (lbs):	8.1
Gross (lbs):	12.9

WEIGHT (METRIC)

Net (kg):	4.3
Net Without Stand (kg):	3.7
Gross (kg):	5.9

DIMENSIONS (IMPERIAL) (WXHxD)

Packaging (in.):	31.2 x 16.6 x 4.8
Physical (in.):	27.1 x 16.1 x 7.3
Physical Without Stand (in.):	27.1 x 12.1 x 1.9

DIMENSIONS (METRIC) (WXHxD)

Packaging (mm):	792 x 422 x 122
Physical (mm):	689 x 408 x 185
Physical Without Stand (mm):	689 x 309 x 48

GENERAL

Regulations:	RoHS, WEEE, VCCI, PSE, KC, K-MEPS, BIS
PACKAGE CONTENTS:	VA2932-MHD x1, 3-pin Plug (IEC C13 / CEE22) x1, HDMI Cable (v1.4; Male-Male) x1, Quick Start Guide x1

Recycle/Disposal:	Please dispose of in accordance with local, state or federal laws.
-------------------	--

Warranty:	*Warranty offered may differ from market to market
-----------	--

Stand-by: 0.5W

Power Supply: Internal Power Supply

ADDITIONAL HARDWARE

Kensington Lock Slot: 1

Copyright © ViewSonic Corporation 2000-2024. All rights reserved.