

ViewSonic® LCD DISPLAY VG1655


Key Features

- Compact, lightweight and portable
- Easily extend display to a larger screen from mobile devices
- 60W USB-C one cable solution for multimedia transfer and power charging
- Elegant, durable metallic design with a foldable stand
- Flexible display setup – work at any angle



Product Description

The ViewSonic VG1655 is a portable 16" Full HD monitor perfect for overcoming one-screen limitations outside the office. Extend the screen from phones, tablets, or laptops for mobile work, one-on-one presentations, or leisure entertainment. The two universal USB Type C connectors provide a one-cable solution for audiovisual and power signal transmission. The adjustable wide stand and pivot-able display will support your working angles. With the anti-slip cover, metal case, and aluminum stand, reliability is embodied in the design.

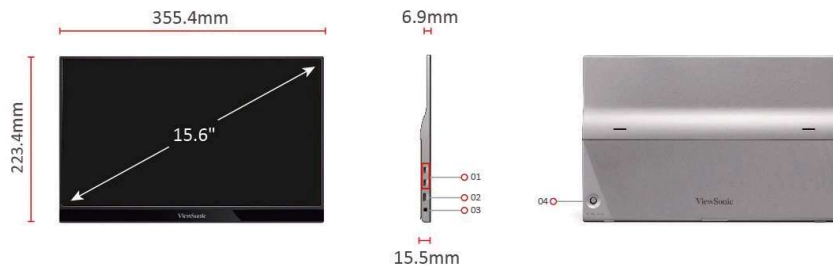

1. USB Type C x2
2. Mini HDMI
3. Audio Out
4. Joy Key

Visit Us

www.viewsonic.com

DISPLAY

Display Size (in.):	16
Viewable Area (in.):	15.6
Panel Type:	IPS Technology
Resolution:	1920 x 1080
Resolution Type:	FHD (Full HD)
Static Contrast Ratio:	800:1 (typ)
Dynamic Contrast Ratio:	50M:1
Light Source:	LED
Brightness:	250 cd/m ² (typ)
Colors:	16.2M
Color Space Support:	8 bit (6 bit + FRC)
Aspect Ratio:	16:9
Response Time (Typical GTG):	6.5ms
Response Time (GTG w/OD):	6.551ms
Response Time (Typical Tr+Tf):	30ms
Viewing Angles:	178° horizontal, 178° vertical, CR>5; 170° horizontal, 170° vertical, CR>10
Backlight Life (Hours):	15000 Hrs (Min)
Curvature:	Flat
Refresh Rate (Hz):	60
Blue Light Filter:	Yes
Color Gamut:	NTSC: 45% size (Typ) sRGB: 64% size (Typ)
Pixel Pitch:	0.179 mm (H) x 0.179 mm (V)
Surface Treatment:	Anti-Glare, Hard Coating (3H)

COMPATIBILITY

PC Resolution (max):	1920x1080
Mac® Resolution (max):	1920x1080
PC Operating System:	Windows 10/11 certified; macOS tested
Mac® Resolution (min):	1920x1080

CONNECTOR

USB 3.2 Type C DisplayPort Alt mode only :	2 (60W power charger)
3.5mm Audio Out:	1
Mini HDMI:	1
Power in:	USB Type C (with video & data)

AUDIO

Internal Speakers:	0.8Watts x2
--------------------	-------------

POWER

Eco Mode (Conserve):	5.1W
Eco Mode (optimized):	6W
Consumption (typical):	7W
Consumption (max):	7.3W
Voltage:	AC 100-240V

CONTROLS

Physical Controls:	Up, Right, Down, Left, Power
On Screen Display:	Input Select, Audio Adjust, ViewMode, Color Adjust, Manual Image Adjust, Setup Menu

OPERATING CONDITIONS

Temperature:	32°F to 104°F (0°C to 40°C)
Humidity (non-condensing):	20% to 90%

INPUT SIGNAL

Frequency Horizontal:	15 ~ 82KHz
Frequency Vertical:	50 ~ 75Hz

VIDEO INPUT

Digital Sync:	TMDS - mini HDMI (v1.4), Micro-Packet - Type C
---------------	--

ERGONOMICS

Tilt (Forward/Back):	20° / 60°
----------------------	-----------

WEIGHT (IMPERIAL)

Net (lbs):	1.8
Net Without Stand (lbs):	1.8
Gross (lbs):	4.8

WEIGHT (METRIC)

Net (kg):	0.82
Net Without Stand (kg):	0.82
Gross (kg):	2.2

DIMENSIONS (IMPERIAL) (WXHxD)

Packaging (in.):	17.3 x 11.3 x 3.5
Physical (in.):	13.99 x 8.8 x 0.61
Physical Without Stand (in.):	13.99 x 8.8 x 0.61

DIMENSIONS (METRIC) (WXHxD)

Packaging (mm):	440 x 288 x 89
Physical (mm):	355.46 x 223.44 x 15.5
Physical Without Stand (mm):	355.46 x 223.44 x 15.5

GENERAL

Regulations:	cTUVus, FCC-B, ICES003, Energy Star, EPEAT, CEC, NRCAN, MX-CoC, Mexico Energy, CE, CE EMC, CB, RoHS, ErP, REACH, WEEE, EAC, UkrSEPRO, BSMI, RCM, GEMS, VCCI, PSE, BIS
--------------	---

PACKAGE CONTENTS:	VG1655 x1, mini HDMI to HDMI Cable (v1.4; Male-Male) x1, USB Type-C Cable (Male-Male) x1, USB Type-C to Type-A 3.2 Gen1 Cable (Male-Male) x1, AC/DC Adapter x1, Quick Start Guide x1, Protect cover x1, Clean cloth x1
-------------------	--

Recycle/Disposal:	Please dispose of in accordance with local, state or federal laws.
-------------------	--

Stand-by:	0.5W	Warranty:	*Warranty offered may differ from market to market
Power Supply:	External Power Adaptor	Power Management:	Energy Star standards, EPEAT

Copyright © ViewSonic Corporation 2000-2024. All rights reserved.