



LCD DISPLAY

VX3218-PC-MHD


Key Features

- 165Hz refresh rate for smooth gameplay
- 1ms (MPRT) response time for precision
- 1500R Curved screen for immersive visuals
- AMD FreeSync™ Premium prevents screen tearing
- Full HD resolution for rich detail



Product Description

The ViewSonic VX3218-PC-MHD features a 32" Full HD display with a 1500R curve for bigger, more immersive gameplay. The hyper-responsive 165Hz refresh rate renders your games with ultra-smooth graphics. A clean design removes the bulk of larger monitors, and a borderless display with sleek dimensions enhances this big screen experience. AMD FreeSync™ Premium prevents screen tearing and stuttering for fluid gameplay and the 1ms MPRT response time enables you to react in-game with speed and precision. The VX3218-PC-MHD is also equipped with ViewSonic's exclusive ViewMode™ presets, which offer optimized screen performance for a variety of needs, such as gaming, editing, or watching movies. In addition, a DisplayPort and HDMI inputs offer flexible connectivity for gaming and entertainment.

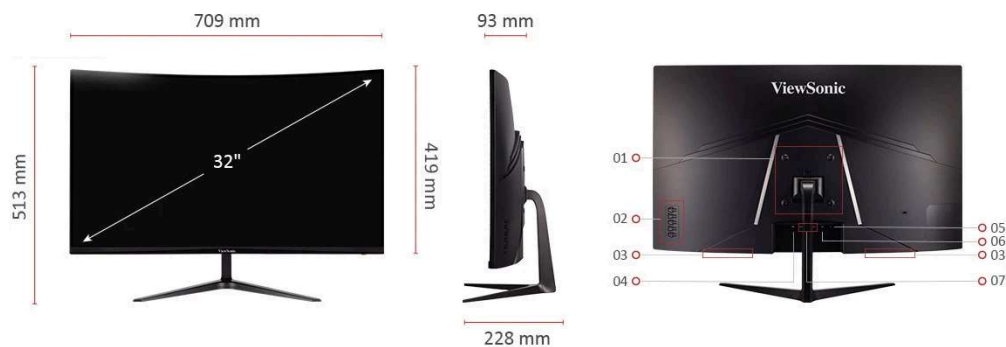

1. VESA Compatible(Wall Mount 100x100mm)
2. Menu Controls
3. Internal Speakers
4. AC In
5. Audio Out
6. DisplayPort

7. HDMI x 2

Visit Us

www.viewsonic.com

DISPLAY

Display Size (in.):	32
Viewable Area (in.):	31.5
Panel Type:	VA Technology
Resolution:	1920 x 1080
Resolution Type:	FHD (Full HD)
Static Contrast Ratio:	3,000:1 (typ)
Dynamic Contrast Ratio:	80M:1
High Dynamic Range:	HDR10
Light Source:	LED
Brightness:	300 cd/m ² (typ)
Colors:	16.7M
Color Space Support:	8 bit (6 bit + FRC)
Aspect Ratio:	16:9
Response Time (MPRT):	1ms
Viewing Angles:	178° horizontal, 178° vertical
Backlight Life (Hours):	30000 Hrs (Min)
Curvature:	1500R
Refresh Rate (Hz):	180
Variable Refresh Rate Technology:	FreeSync Premium
Blue Light Filter:	Yes
Flicker-Free:	Yes
Color Gamut:	NTSC: 72% size (Typ) sRGB: 104% size (Typ)
Pixel Pitch:	0.364 mm (H) x 0.364 mm (V)
Surface Treatment:	Anti-Glare, Hard Coating (3H)

COMPATIBILITY

PC Resolution (max):	1920x1080
Mac® Resolution (max):	1920x1080
PC Operating System:	Windows 11 certified; macOS tested
Mac® Resolution (min):	1920x1080

CONNECTOR

3.5mm Audio Out:	1
HDMI 1.4:	2
DisplayPort:	1
Power in:	DC Socket (Center Positive)

AUDIO

Internal Speakers:	2Watts x2
--------------------	-----------

POWER

Eco Mode (Conserve):	21W
Eco Mode (optimized):	27W
Consumption (typical):	33W
Consumption (max):	38W
Voltage:	AC 100-240V

CONTROLS

Physical Controls:	Key 1 (power), Key 2, Key 3, Key 4, Key 5 (favorite)
On Screen Display:	Input Select, Audio Adjust, ViewMode, Color Adjust, Manual Image Adjust, Setup Menu

OPERATING CONDITIONS

Temperature:	32°F to 104°F (0°C to 40°C)
Humidity (non-condensing):	20% to 90%

WALL MOUNT

VESA Compatible:	100 x 100 mm
------------------	--------------

INPUT SIGNAL

Frequency Horizontal:	30 ~ 215KHz
Frequency Vertical:	48 ~ 180Hz

VIDEO INPUT

Digital Sync:	TMDS - HDMI (v1.4), PCI-E - DisplayPort (v1.4)
---------------	--

ERGONOMICS

Tilt (Forward/Back):	-5° / 20°
----------------------	-----------

WEIGHT (IMPERIAL)

Net (lbs):	10.4
Net Without Stand (lbs):	9.3
Gross (lbs):	15.4

WEIGHT (METRIC)

Net (kg):	4.7
Net Without Stand (kg):	4.2
Gross (kg):	7

DIMENSIONS (IMPERIAL) (WXHxD)

Packaging (in.):	38.2 x 20.6 x 6.7
Physical (in.):	27.9 x 20.2 x 9
Physical Without Stand (in.):	27.9 x 16.5 x 3.7

DIMENSIONS (METRIC) (WXHxD)

Packaging (mm):	970 x 523 x 170
Physical (mm):	709 x 513 x 228
Physical Without Stand (mm):	709 x 419 x 93

GENERAL

Regulations:	cTUVus, FCC-B, ICES003, CEC, NOM, Mexico Energy, CE, CE EMC, CB, RoHS, ErP, REACH, WEEE, EAC, UkrSEPRO, BSMI, RCM, GEMS, VCCI, PSE, BIS
--------------	---

PACKAGE CONTENTS:

	VX3218-PC-MHD x1, 3-pin Plug (IEC C13 / CEE22) x1, DisplayPort Cable (v1.2; Male-Male) x1, AC/DC Adapter x1, Quick Start Guide x1
Recycle/Disposal:	Please dispose of in accordance with local, state or federal laws.
Warranty:	*Warranty offered may differ from market to

Stand-by:	0.5W
Power Supply:	External Power Adaptor

ADDITIONAL HARDWARE

Kensington Lock Slot:	1
-----------------------	---

Copyright © ViewSonic Corporation 2000-2024. All rights reserved.