

ViewSonic® LCD DISPLAY

VX3276-MHD-3


Key Features

- SuperClear® IPS Technology
- Frameless Bezel and metallic triangle stand
- Full HD 1080p resolution
- 75Hz Refresh Rate with Adaptive Sync
- HDR10 Support



Product Description

The ViewSonic VX3276-MHD-3 is the perfect blend of style and performance with features that include a sizeable 32" (31.5" viewable) Full HD display and minimalist design. With an ultra-slim profile, metallic silver triangle stand, and sleek edge-to-edge frameless bezel, the monitor has a premium feel that fits nicely both at home and in the office. VX3276-MHD-3 features 1080p resolution, IPS-type panel technology and support for industry standard HDR10. Combined with dual integrated speakers, this monitor produces astonishing visual and sound effects from multimedia contents.

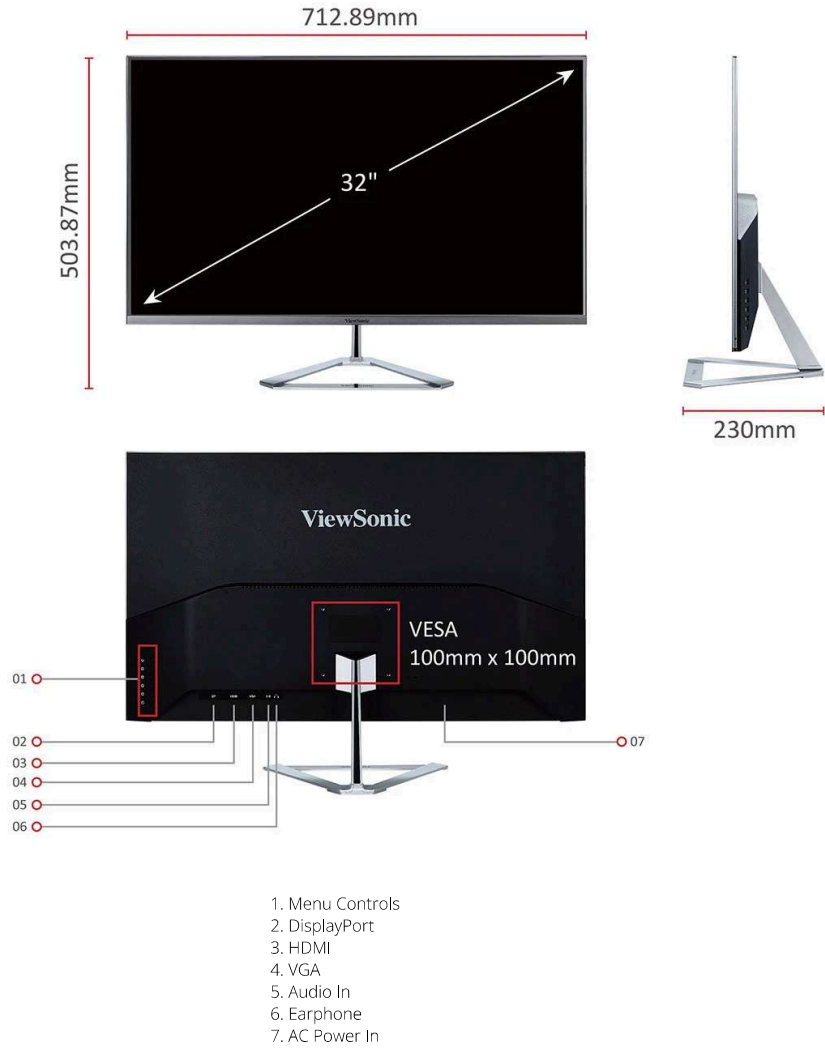

Visit Us www.viewsonic.com

DISPLAY

Display Size (in.):	32
Viewable Area (in.):	31.5
Panel Type:	IPS Technology
Resolution:	1920 x 1080
Resolution Type:	FHD (Full HD)
Static Contrast Ratio:	1,200:1 (typ)
Dynamic Contrast Ratio:	80M:1
High Dynamic Range:	HDR10
Light Source:	LED
Brightness:	250 cd/m ² (typ)
Colors:	16.7M
Color Space Support:	8 bit true
Aspect Ratio:	16:9
Response Time (Typical GTG):	4ms
Viewing Angles:	178° horizontal, 178° vertical
Backlight Life (Hours):	30000 Hrs (Min)
Curvature:	Flat
Refresh Rate (Hz):	75
Variable Refresh Rate Technology:	Yes
Blue Light Filter:	Yes
Flicker-Free:	Yes
Color Gamut:	NTSC: 72% size (Typ) sRGB: 104% size (Typ)
Pixel Pitch:	0.364 mm (H) x 0.364 mm (V)
Surface Treatment:	Anti-Glare (Semi-Glossy), Hard Coating (3H)

COMPATIBILITY

PC Resolution (max):	1920x1080
Mac® Resolution (max):	1920x1080
PC Operating System:	Windows 7/8/8.1/10/11 certified; macOS tested
Mac® Resolution (min):	1920x1080

CONNECTOR

VGA:	1
3.5mm Audio In:	1
3.5mm Audio Out:	1
HDMI 1.4:	1
DisplayPort:	1
Power in:	3-pin Socket (IEC C14 / CEE22)

AUDIO

Internal Speakers:	2Watts x2
--------------------	-----------

POWER

Eco Mode (Conserve):	26W
Eco Mode (optimized):	31W
Consumption (typical):	36W

CONTROLS

Physical Controls:	Key 1 (game mode), Key 2, Key 3, Key 4, Key 5, Key 6 (power)
On Screen Display:	Input Select, Audio Adjust, ViewMode, Color Adjust, Manual Image Adjust, Setup Menu

OPERATING CONDITIONS

Temperature:	32°F to 104°F (0°C to 40°C)
Humidity (non-condensing):	20% to 90%

WALL MOUNT

VESA Compatible:	100 x 100 mm
------------------	--------------

INPUT SIGNAL

Frequency Horizontal:	24 ~ 86KHz
Frequency Vertical:	50 ~ 75Hz

VIDEO INPUT

Digital Sync:	TMDS - HDMI (v1.4), PCI-E - DisplayPort (v1.4)
Analog Sync:	Separate - RGB Analog

ERGONOMICS

Tilt (Forward/Back):	-4° / 15°
----------------------	-----------

WEIGHT (IMPERIAL)

Net (lbs):	13.7
Net Without Stand (lbs):	12.3
Gross (lbs):	18.1

WEIGHT (METRIC)

Net (kg):	6.2
Net Without Stand (kg):	5.6
Gross (kg):	8.2

DIMENSIONS (IMPERIAL) (WXHxD)

Packaging (in.):	31.7 x 20 x 4.3
Physical (in.):	28.1 x 19.8 x 9.1
Physical Without Stand (in.):	28.1 x 16.4 x 1.5

DIMENSIONS (METRIC) (WXHxD)

Packaging (mm):	806 x 509 x 109
Physical (mm):	713 x 504 x 230
Physical Without Stand (mm):	713 x 416 x 38

GENERAL

Regulations:	CE, CE EMC, CB, RoHS, ErP, REACH, WEEE, EAC, UkrSEPRO, BSMI, RCM, GEMS, BIS
--------------	---

PACKAGE CONTENTS:	VX3276-MHD-3 x1, 3-pin Plug (IEC C13 / CEE22) x1, HDMI Cable (v1.4; Male-Male) x1, Quick Start Guide x1
-------------------	---

Recycle/Disposal:	Please dispose of in accordance with local, state or federal laws.
-------------------	--

Warranty:	*Warranty offered may differ from market to market
-----------	--

Consumption (max):	40W
Voltage:	AC 100-240V
Stand-by:	0.5W
Power Supply:	Internal Power Supply

ADDITIONAL HARDWARE

Kensington Lock Slot:	1
-----------------------	---

Copyright © ViewSonic Corporation 2000-2024. All rights reserved.