

# ViewSonic® LCD DISPLAY VA2732-mh


## Key Features

- SuperClear® IPS panel
- Full HD 1080p resolution
- 100Hz Variable Refresh Rate delivers fluid visuals
- 1ms (MPRT) response time for precision
- Built-in Low Blue Light Screen for comfortable viewing



## Product Description

The ViewSonic VA2732-MH is a 27" (27" viewable) Full HD Monitor with IPS technology and flexible connectivity for use in the office or at home. With SuperClear® IPS technology and Full HD resolution, images are clear and detailed from a wide range of viewing angles. Integrated speakers ensure a crisp and clear sound while HDMI and VGA inputs allow for increased setup flexibility when connecting with other devices. The VA2732-MH's three-sided frameless bezel delivers a seamless viewing experience and comes equipped with Eye Care technology to help eliminate eye strain resulting from extended viewing periods. VESA compatibility guarantees easy adaption to both multi-monitor or wall-mount set ups.

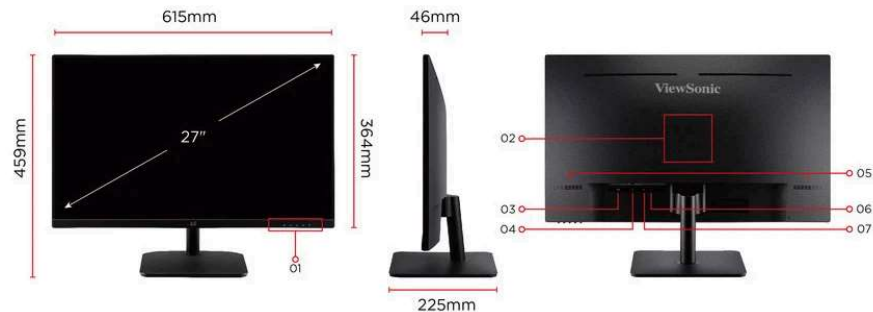

1. Menu Control Panel
2. VESA Compatible(Wall Mount 75 x 75mm)
3. HDMI
4. VGA
5. Speakers
6. Power In

7. Audio Out

Visit Us

[www.viewsonic.com](http://www.viewsonic.com)

**DISPLAY**

Display Size (in.):	27
Viewable Area (in.):	27
Panel Type:	IPS Technology
Resolution:	1920 x 1080
Resolution Type:	FHD (Full HD)
Static Contrast Ratio:	1,000:1 (typ)
Dynamic Contrast Ratio:	50M:1
Light Source:	LED
Brightness:	250 cd/m <sup>2</sup> (typ)
Colors:	16.7M
Color Space Support:	8 bit (6 bit + FRC)
Aspect Ratio:	16:9
Response Time (MPRT):	1ms
Viewing Angles:	178° horizontal, 178° vertical
Backlight Life (Hours):	30000 Hrs (Min)
Curvature:	Flat
Refresh Rate (Hz):	100
Variable Refresh Rate Technology:	Yes
Blue Light Filter:	Yes
Flicker-Free:	Yes
Color Gamut:	NTSC: 77% size (Typ) sRGB: 109% size / 99% coverage (Typ)
Pixel Pitch:	0.311 mm (H) x 0.311 mm (V)
Surface Treatment:	Anti-Glare, Hard Coating (3H)
<b>COMPATIBILITY</b>	
PC Resolution (max):	1920x1080
Mac® Resolution (max):	1920x1080
PC Operating System:	Windows 10/11 certified; macOS tested
Mac® Resolution (min):	1920x1080
<b>CONNECTOR</b>	
VGA:	1
3.5mm Audio Out:	1
HDMI 1.4:	1
Power in:	DC Socket (Center Positive)
<b>AUDIO</b>	
Internal Speakers:	2Watts x2
<b>POWER</b>	
Eco Mode (Conserve):	20W
Eco Mode (optimized):	24W
Consumption (typical):	28W
Consumption (max):	30W
Voltage:	AC 100-240V

**CONTROLS**

Physical Controls:	Key 1 (favorite), Key 2, Key 3, Key 4, Key 5 (power)
On Screen Display:	Input Select, Audio Adjust, ViewMode, Color Adjust, Manual Image Adjust, Setup Menu

**OPERATING CONDITIONS**

Temperature:	32°F to 104°F (0°C to 40°C)
Humidity (non-condensing):	20% to 90%

**WALL MOUNT**

VESA Compatible:	100 x 100 mm
------------------	--------------

**INPUT SIGNAL**

Frequency Horizontal:	RGB Analog: 24 ~ 86KHz, HDMI (v1.4): 24 ~ 115KHz
Frequency Vertical:	RGB Analog: 48 ~ 75Hz, HDMI (v1.4): 48 ~ 100Hz

**VIDEO INPUT**

Digital Sync:	TMDS - HDMI (v1.4)
Analog Sync:	Separate - RGB Analog

**ERGONOMICS**

Tilt (Forward/Back):	-5° / 20°
----------------------	-----------

**WEIGHT (IMPERIAL)**

Net (lbs):	9
Net Without Stand (lbs):	7.9
Gross (lbs):	13.2

**WEIGHT (METRIC)**

Net (kg):	4.1
Net Without Stand (kg):	3.6
Gross (kg):	6

**DIMENSIONS (IMPERIAL) (WXHXD)**

Packaging (in.):	27.4 x 18.1 x 5.7
Physical (in.):	24.2 x 18.1 x 8.9
Physical Without Stand (in.):	24.2 x 14.3 x 1.8

**DIMENSIONS (METRIC) (WXHXD)**

Packaging (mm):	695 x 460 x 145
Physical (mm):	615 x 459 x 225
Physical Without Stand (mm):	615 x 364 x 46

**GENERAL**

Regulations:	RoHS, ErP, WEEE, BSMI, KC, K-MEPS, BIS
PACKAGE CONTENTS:	VA2732-MH x1, 3-pin Plug (IEC C13 / CEE22) x1, HDMI Cable (v1.4; Male-Male) x1, AC/DC Adapter x1, Quick Start Guide x1
Recycle/Disposal:	Please dispose of in accordance with local, state or federal laws.
Warranty:	*Warranty offered may differ from market to market

Stand-by: 0.3W

Power Supply: External Power Adaptor

**ADDITIONAL HARDWARE**

Kensington Lock Slot: 1

Copyright © ViewSonic Corporation 2000-2024. All rights reserved.